

# DUPLEX AIR COMPRESSOR

**Tank Mounted - 120-Gallon - Horizontal - Electric**

## Standard Features:

- ✓ **Vibration isolation pads** - Isolators protect the unit from vibration during use
- ✓ **Pneumatic drain** - Automatically drains liquid from compressor tank
- ✓ **Hour meter** - Displays number of hours unit has been in operation
- ✓ **Starter** - For thermal overload protection, required for units 5.0 horsepower and up, NEMA-4 box standard
- ✓ **After cooler** - Removes up to 65% of moisture and drops temperature within 10 degrees of ambient
- ✓ **Low oil monitor** - Low oil sensor does not allow unit to start when oil levels fall below an adequate level
- ✓ **Pressure gauges**

HP	TANK SIZE	MODEL NO.	PUMP RPM	VOLTAGE/ AMPERAGE/PHASE	CFM DELIVERED @ 175 PSI
5.0	120-gallon	ACD-23105-120HM	860	230V, 46.0A, 1 Phase	36.0
5.0	120-gallon	ACD-20305-120HM	860	200V, 32.2A, 3 Phase	36.0
5.0	120-gallon	ACD-23305-120HM	860	230V, 27.6A, 3 Phase	36.0
5.0	120-gallon	ACD-46305-120HM	860	460V, 13.8A, 3 Phase	36.0


## Additional specs for the above models:

DIMENSIONS LxWxH	BOLT DOWN LxW	SHIP WT.	NET WT.
74 x 26.5 x 58in.	34.5 x 23.5in.	950 lb.	871 lb.

Limited Warranties:

**2 Year**  
Electric Motor

**5 Year**  
Compressor Pump

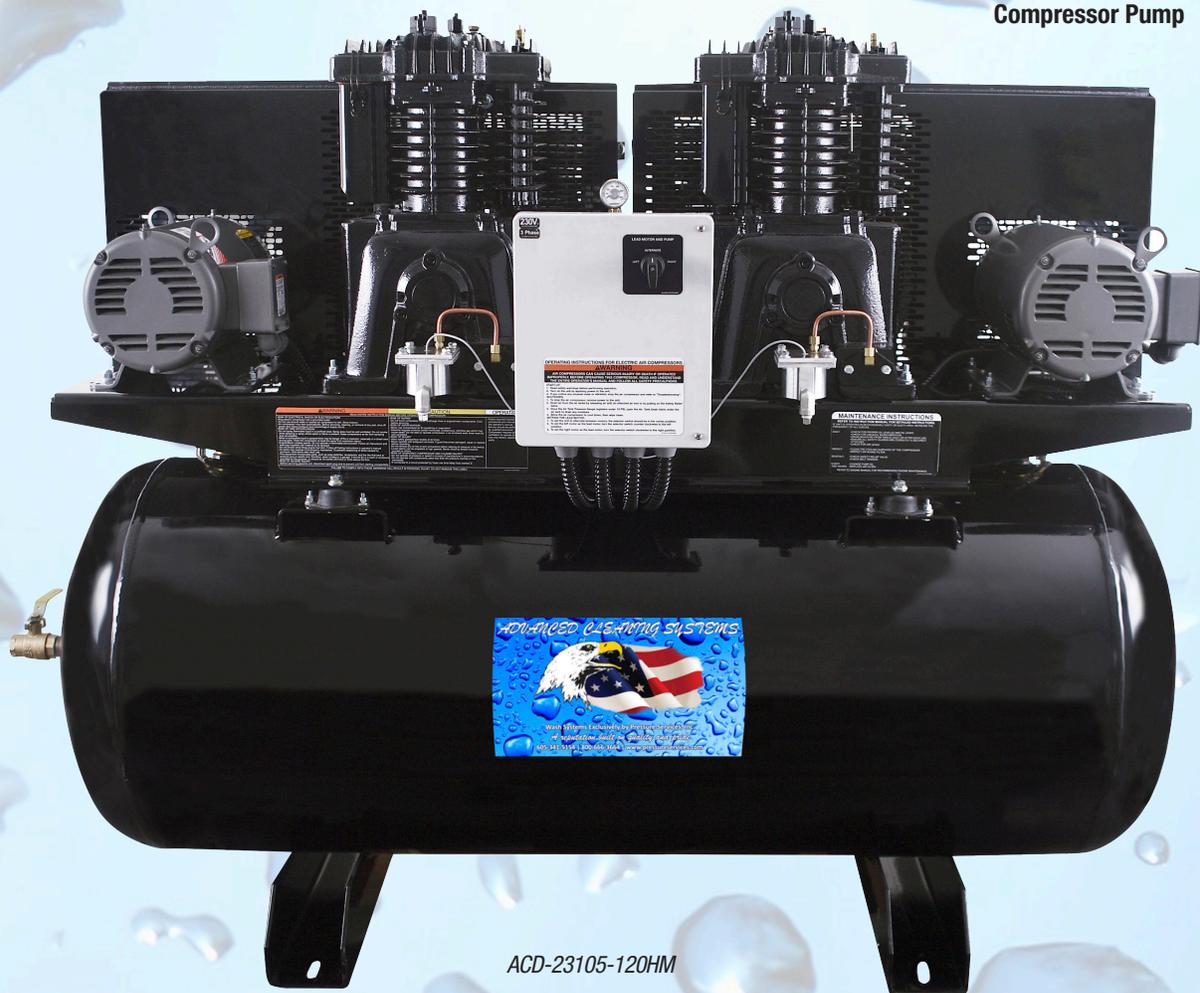

ACD-23105-120HM



2361 South Plaza Drive Rapid City, SD 57702  
605-341-5154 | 800-666-3664 | Fax: 605-341-4843  
Visit our web site at: [www.pressureservices.com](http://www.pressureservices.com)