

PROFILE



SOFT TOUCH
VEHICLE WASH SYSTEMS



www.washworldinc.com | 920.338.9278 | 888.315.7253



MISSION STATEMENT

Washworld, Inc. will provide the most user friendly, technologically advanced and consistently reliable in-bay automatic car wash systems available. Our highly trained, experienced professionals will strive to exceed our customers' expectations while creating employee, distributor and customer relationships that will last a lifetime.

TABLE OF CONTENTS

01-14

PROFILE®

01 - 04	STANDARD FEATURES
05 - 09	OPTIONAL FEATURES
10	SOLUTION DELIVERY SYSTEM
11	IN-BAY EQUIPMENT PACKAGE
12	STANDARD FEATURES - QUICK LIST
13	OPTIONAL FEATURES - QUICK LIST
14	PROFILE SPECS

15-24

PROFILE® LXR

15 - 18	STANDARD FEATURES
19 - 20	OPTIONAL FEATURES
21	SOLUTION DELIVERY SYSTEM
22	IN-BAY EQUIPMENT PACKAGE
23	STANDARD FEATURES - QUICK LIST
24	OPTIONAL FEATURES - QUICK LIST

25-27

DRYING SYSTEMS

25	HIGH VELOCITY® VEHICLE DRYING SYSTEM
26	ON-BOARD VEHICLE DRYING SYSTEM
27	LUMENDRY™ - OPTIONAL DRYER SYSTEM FEATURE

28-29

SIGNS

29-30

WATER TREATMENT

31

CUSTOMER SERVICE

32

WARRANTY

SOFT TOUCH VEHICLE WASH SYSTEMS - PROFILE®



PROFILE

Washworld's Profile® is the answer to your growing car wash business. It is the soft touch system that combines Washworld's advanced technology used in our touch-free systems with the latest in washing materials. Like all Washworld's systems, Profile was designed with emphasis on durability, simplicity of use and reduced maintenance. Profile is your profit generator!

WHAT MAKES PROFILE DIFFERENT?



LONGEVITY / ROI

STAINLESS STEEL


Without a doubt, the most durable material for use in a car wash is stainless steel. When other manufacturers are using cheaper, less durable materials in their machines, Washworld refuses to compromise on quality and uses stainless steel throughout. The stainless steel used for Profile's wall mounting system, travel rails and laser cut overhead wash carriage, ensures that Profile is the most long lasting, durable system.

ADVANCED DRIVE MOTION TECHNOLOGY

Profile's belt drive utilizes multiple variable frequency drive technology with a clean and simple design. Both the rotation and independent movement of the dual side wash media and top wash media are variable frequency drive controlled to ensure a smooth operation and a precise application of all solutions and water. What does this mean for you? A gentle yet effective wash experience, no wasted water or chemicals, fewer moving components, less weight, reduced maintenance and most of all a quicker return on investment!

REDUCED MAINTENANCE

All Washworld systems are designed with a focus on reduced maintenance costs. Sealed gearboxes eliminate the need for oil changes. Reduced weight and less motion equal less wear and tear. High quality, premium components and materials withstand the harsh wash bay conditions resulting in a longer life.

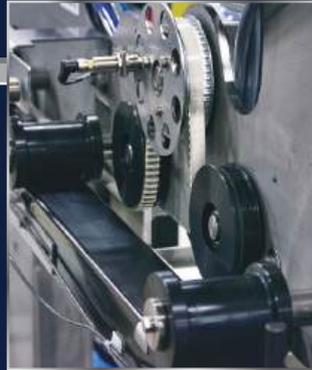

ENERGY CHAIN

Profile's innovative cable carrier protects moving cables and hoses from abrasion and entanglement. The energy chain also provides a controlled bend radius of cables and hoses to prevent pinching or kinking. The non-metallic construction ensures quiet performance, longer cable life and extended supply line life.



Especially important when positioning vehicles within a soft touch vehicle wash bay, Washworld's Vehicle Sizing System (VS²®), with precise loading feature, utilizes advanced software coupled with photo eye technology to provide a safe and reliable means of positioning the vehicle in the wash bay. This eliminates the need for floor mounted treadle plates or wheel stops, resulting in a significant reduction in wiring and fewer components to maintain.




PROFILE STANDARD FEATURES

OPERATOR FAVORITE



DSP - DIGITAL SURFACE PROFILE

Washworld's exclusive DSP - Digital Surface Profile system is the advanced method of reading a vehicle's contours to allow for the most precise cleaning possible. Utilizing 3D imaging, DSP enables Profile to adjust for various vehicle surfaces to deliver a wash that reaches every angle with Profile's super soft polyethylene foam wash media. The DSP System offers consistent length, width and height measuring of vehicles for optimal product application and cleaning. This results in a gentle and effective wash experience and ensures that products are applied to the vehicle not the floor, which saves money and reduces wash times by customizing the travel distance of the Profile based on the length of each individual vehicle.



WASH MEDIA

INNOVATIVE WASH MEDIA

Profile's super soft blue side and top polyethylene foam wash media comes equipped with Clean Rinse, Washworld's wash media cleaning and lubricating system. The Clean Rinse System keeps the media from retaining dirt and debris which results in the best possible customer experience.

PROFILE MIRROR DETAILER

The mirror detailer feature offers the ability to increase throughput by cleaning both sides of mirrors using a single soft touch pass. The wash media pass can start at the front or the rear, once the side brush has passed the mirror it will reverse direction to effectively clean both sides of the mirror, then completes the pass.

SIDE BRUSH EXCHANGE

This feature is an added benefit to customers that run a single side brush on the front and rear of a vehicle. When enabled, it will alternate each side brush ensuring that both the left and right brushes are used equally.



OPERATOR FAVORITE



With Profile's standard Washview® HMI On-Site, a color touch screen gives you complete access to Profile including programming, maintenance, diagnostics and wash counts. No on-site PC or laptop is needed to configure your wash. Profile also features a comprehensive integrated notification system which can monitor auto cashiers, doors, fluid levels and more. In addition, the Wash Package Storage capability allows for up to 16 wash packages to be retained which can be quickly copied to the immediate wash setup.



Waterproof hand held RF remote control for manual movement and machine functions

PROFILE STANDARD FEATURES




Standard on Profile is Washworld's Flex Pass® dual application system. This stainless steel, angled flood style pods and an overhead 6 nozzle stainless steel manifold applies up to 8 different applications to the entire vehicle (top, sides, front and rear). The Flex Pass application system is mounted on both the entrance and exit end of the Profile carriage. This allows for two product applications to be applied to the vehicle in a single pass. Applications can be programmed from front to rear or rear to front to minimize machine movement. The speeds are adjustable individually in both directions which expedites the wash process to increase the throughput of cars, which in turn translates into greater profits for you!



EYE CATCHING LEDS

For can't miss customer attraction, brilliant blue LEDs illuminate Profile's high gloss composite wash carriage cover.

Dual 10" long green and red LEDs line the entrance side cover, combined with audible voice prompts that coincide with the in-bay instructional signage, help to position the vehicle in the wash bay. Even when idle, the red and green LEDs can sequence to draw attention to the wash bay with an eye-catching light show.

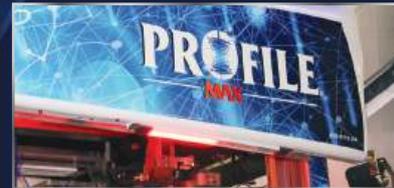

BUY-UP OPTION



Four customizable buy-up options allow your Auto Cashier to up-sell for you which renders greater wash package flexibility and maximized profits!



VOICE PROMPTS

Your customers will never need to guess what to do next with Profile's voice prompts. Audible instructions and information are linked to Profile's instructional signage. Standard on Profile, the voice prompt is in English, however is customizable for other languages, dialects or custom voice messages.



PROFILE OPTIONAL FEATURES



POWER TOWER WHEEL CLEANER

Effective wheel cleaning that will keep your customers coming back! The 40" high tower features 4 stainless steel zero degree rotating turbo nozzles, providing intense cleaning as well as great customer appeal. Power Tower Wheel Cleaner® manifolds are fabricated completely from stainless steel wrapped in a vibrant blue, rotationally molded polyethylene cover and is available with or without eye-catching blue LEDs. Not only is the Power Tower Wheel Cleaner effective for wheel cleaning, but it is great for removing mud, snow and ice from rocker panels and running boards!



BIG SHOT

CHEMICAL TIRE APPLICATION

Big Shot™ chemical tire applicator is constructed from stainless steel and specifically designed to target your tires/wheels for impeccable results. Pre-charged solution and air manifolds are photo eye activated and software controlled with customizable settings. Big Shot's strategic placement after the undercarriage provides maximum dwell time for optimal performance. Two application towers with three applicator nozzles on each tower per side (driver and passenger side) provide complete coverage. Top and bottom nozzles have a 10-degree angle adapter for precise application adjustment. Each application tower can deliver a different tire/wheel cleaning product (high pH and low pH) or a dual application of the same product.



UNDERCARRIAGE & ROCKER PANEL BLASTER

The undercarriage and rocker panel blaster is specially designed to thoroughly attack any dirt, debris and snow on the lower portion of your vehicle. For use with the high-pressure pump option, the undercarriage and rocker panel blaster consists of 11 stainless steel nozzles; 3 on the undercarriage and 4 on each rocker panel blaster. For use with non-high-pressure systems, it consists of a medium pressure 5 hole undercarriage manifold.



wwexclusive CHEM ALERT


Monitoring your chemical levels has never been easier! Washworld's chemical monitoring system allows you to remotely monitor up to 16 different product levels by utilizing an adjustable capacitive sensor that is mounted to each chemical container. The adjustable low-level sensor triggers an alert on the Washview® and a notification is conveniently sent via email or text. As an additional benefit, product labels can even be customized in your HMI to reflect the names of your products. Monitoring your chemical levels helps you to reduce system downtime and ensures your car wash is running smoothly.



PROFILE OPTIONAL FEATURES

SPECTRA RAY™

A spectacular array of over 4,500 LEDs fill the wash bay with SpectraRay™! The red, magenta, blue and green LEDs are fully programmable to add splashes of various colors during any or all of the product applications to accentuate the entire wash process. The colors can sequence through flashing colors for an intense experience, switch to a steady color at any point to coincide with your wash package and even coordinate with your in-bay instruction sign. Even when idle, SpectraRay can sequence through color to draw attention to the wash bay with an eye-catching light show making it unique and memorable. Transform your car washing experience in a big way by bathing your wash bay in red, magenta, blue and green!

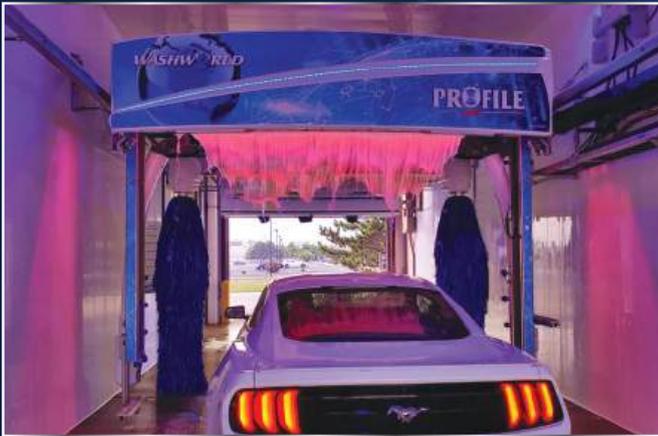

SPECTRA RAY+™

SpectraRay+™ works in conjunction with SpectraRay to take the spectacular LED light show to the next level!

SpectraRay+ includes an adjustable stainless steel wall or pedestal mounted system, bringing the intense light show to eye level. The colors can sequence through flashing colors for an intense experience, switch to a steady color at any point to coincide with your wash package and even coordinate with your in-bay instruction sign. When paired together, SpectraRay+ and SpectraRay synchronize to flood the wash bay with red, magenta, blue and green creating an ultimate light show that customers won't forget!



PROFILE OPTIONAL FEATURES



TOUCH POWER WHEEL DETAILER

Washworld's Touch Power Wheel Detailer™ combines tire chemical application, high-pressure nozzles and a soft yet durable wash media for sparkling clean results. Profile's DSP (Digital Surface Profile) identifies the size and location of the tires. The wash media rotates clockwise and counterclockwise for a precise clean every time. (Not available with Profile On-Board Dryer)

Extended Solution Delivery (ESD) for chemical application is standard on Profile MAX.
Requires ESD for chemical application on Profile ST.



TOUCH-FREE POWER WHEEL DETAILER

Washworld's Touch-Free Power Wheel Detailer™ combines tire chemical application, high-pressure nozzles and rapid wheel blasters for better than hand applied results. Profile's DSP (Digital Surface Profile) identifies the size and location of the tires for a precise wheel blast every time! Additionally, when traveling along the vehicle during the high-pressure rinse, the front facing side nozzles will activate to give your mirrors a deep clean.

Extended Solution Delivery (ESD) is standard on Profile MAX.
Requires ESD for chemical application on Profile ST.



Washworld's optional Washview® Mobile provides virtually the same technologies as Washview On-Site (standard), however it allows you to access and control Profile from anywhere in the world via a high-speed Internet connection. Washview Mobile uses the Vijeo Design'Air app (purchased separately) for your smart phone or tablet to give you mirror image access of your HMI. It even gives you the ability to receive text or email notifications to keep you fully informed!



PROFILE OPTIONAL FEATURES

FOAM 'n FLOW

More show, more shine, more revenue with Washworld's Foam 'n Flow® application system! It produces high end results for extra profit generation. Complete with full, dramatic product enhancing LED backlighting, Foam 'n Flow can be used to make an impressive foaming sheet with most Carnauba, hot wax, polish and conditioning products on the market.




Bug A'Salt

Washworld is launching an all-out war on bugs and salt residue with our extra step vehicle preparation Bug A'Salt™. This unique concentrated attack targets bugs and salt film on the front bumper/grill and windshield/mirrors leaving vehicles cleaner and your customers happier.

A specific bug/salt formulated product is applied through a specific Bug A'Salt manifold utilizing a low-pressure injector. The manifold applies the product from the passenger side mirror to the driver side mirror and back for a double application providing extensive dwell time for superior results.

Bug A'Salt is standard on Profile MAX.
Bug A'Salt is included in the Extended Solution Delivery (ESD) option on Profile ST.

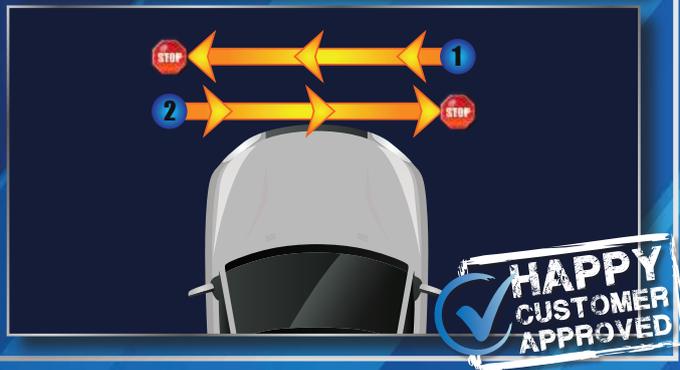

TRI-COLOR FOAM

There is simply no better Tri-Color Foam application available! Washworld's Tri-Color Foam features completely adjustable nozzles for coverage the way you want it, where you want it.





CUSTOM GRAPHICS

Promote your brand with custom graphics! Make a memorable impression on your customers, distinguishing yourself from your competitors by customizing your Profile cover graphics to be consistent with your brand.

SOLUTION DELIVERY SYSTEM (SDS)

Profile's wall mounted stainless steel solution delivery panel is built with high quality materials and built to last. The Solution Delivery System comes loaded with standard features such as direct feed solutions system and stainless steel chemical manifold and Flex Pass dual application system. Profile MAX includes Extended Solution Delivery (ESD). The solution delivery pump is wall mounted utilizing its own stainless steel bracket.

MEDIUM PRESSURE SDS STANDARD FEATURES


- Wall mounted stainless steel pump panel
- 8 Composite direct injectors (Profile ST) / 12 injectors (Profile MAX)
- Flex Pass® dual application system has the ability to apply 2 different product applications at the same time
- Direct feed solutions system provides more control
- Stainless steel chemical manifold
- Stainless steel / composite direct feed chemical delivery system

OPTIONAL FEATURES

- Extended solution delivery (ESD) including Bug A'Salt™ technology, tire wheel injector and 2 additional applications (optional on Profile ST, standard on Profile MAX)
- Tri-Color Foam application system
- Spot free re-pressurization pump
- Foam 'n Flow® application system

ULTRA COMPACT HIGH PRESSURE DELIVERY SYSTEM

- Space saving design, simple installation, easy to maintain
- Heavy duty powder coated frame utilizes proven protective primer
- Cat 2530 Pump - Variable pressure, up to 1,200 psi, 25 GPM
- One piece rotationally molded corrosion proof MDPE tank
- Electronic control valve / capacitive tank level sensor

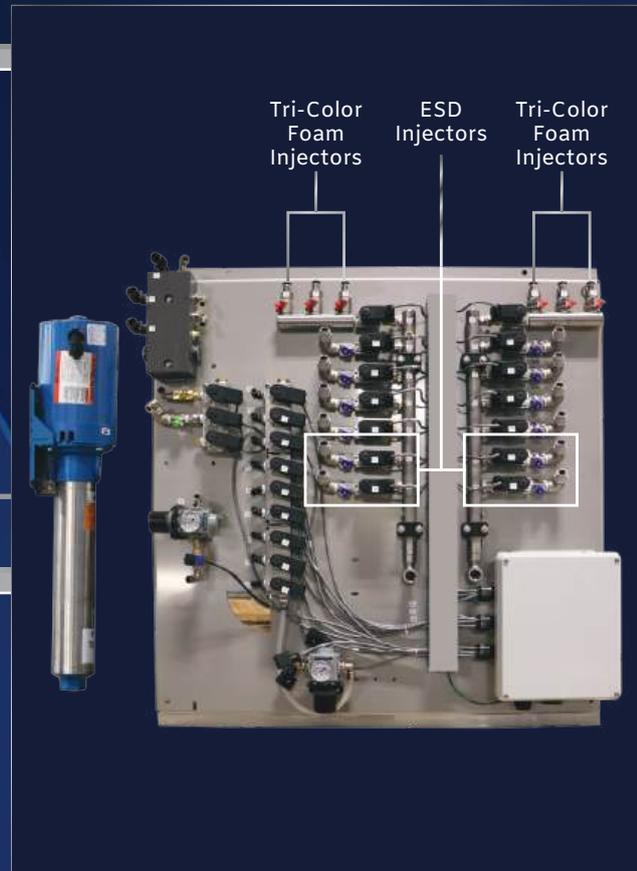

Optional On Profile ST
Standard On Profile MAX

IN - BAY EQUIPMENT PACKAGE

For locations without an equipment room, the In-Bay Equipment Package comes with the Pump Station that offers the same cutting-edge technology incorporated in a space saving design to be located directly in your wash bay. Featuring a one piece heavy duty frame, stainless steel bulk head manifold for incoming and outgoing supply lines. Removable non corrosive ABS panels for the front, back, sides and top keep direct water spray and debris out. It includes an easy access port for maintenance without removing the panels. The standard UCC is replaced with a stainless steel cabinet and a hinged water resistant, clear polycarbonate HMI cover. The In-Bay Equipment Package is designed for long life in even the harshest of conditions.



STANDARD FEATURES

- Simple to install, space saving design: 37"H x 96"L x 26"D
- Deluxe cover package with enclosed base protects equipment and looks great in your bay
- Removable panels allow for complete access and easy maintenance
- Heavy duty powder coated frame utilizes proven protective primer
- Cat 2530 Pump - Variable pressure, up to 1,200 psi, 25 GPM
- Deluxe oil change kit allows easy access for service
- 8 Composite direct injectors (Profile ST), 12 injectors (Profile MAX)
- One piece rotationally molded corrosion proof MDPE tank
- Stainless steel top feed and discharge manifold
- Direct feed solutions system provides more control
- Stainless steel chemical manifold
- Stainless steel / composite direct feed chemical delivery system
- Flex Pass® dual application system

OPTIONAL FEATURES

- Tri-Color Foam application system
- Foam 'n Flow® application system
- Built in spot free re-pressurization system
- Reclaim system adapter kit
- Built in high capacity 12kw electric water heater



IN-BAY WALL MOUNT SYSTEM - STAINLESS STEEL

- Stainless steel travel rails (34' 0" overall length)
- Stainless steel wall mounting hardware
- Floor mounted blue reflectors for visual guidance

OVERHEAD CARRIAGE AND TROLLEY FRAME - LASER CUT STAINLESS STEEL

- High gloss composite wash carriage and side wash media covers with blue LED accent lighting on entrance carriage cover
- Dual 10" long red and green LEDs mounted on entrance cover
- Variable frequency controlled belt drive carriage and trolley movements
- VS²® (Vehicle Sizing System)
- DSP (Digital Surface Profile) technology
- Composite Energy Chain for electrical and solution distribution
- Super soft blue polyethylene foam wash media (side and top)
- Clean Rinse System - Wash media cleaning and lubricating system
- Stainless steel carriage, climate proof motors and gearboxes
- Flex Pass® dual application system
- Mirror detailer - Cleans both sides of mirrors in a single pass
- Side brush exchange

SOLUTION DELIVERY SYSTEM (SDS) / WALL MOUNTED STAINLESS STEEL PUMP PANEL

- Multiple stage solution delivery pump system (capable of 225psi)
- Wall mounted stainless steel pump panel
- 8 composite direct injectors (Profile ST)
- 12 composite direct injectors (Profile MAX)
- Direct feed solutions system provides more control
- Medium pressure rinse capability

ULTIMATE CONTROL CABINET

- Electrical control panel 208VAC (VFD controls on seven motors)
- Washview® HMI On-Site control interface - Complete on-site programming and diagnostic capability
- Wash activation buy-up compatibility
- Comprehensive integrated notification system
- In-bay voice module to communicate Profile® actions to customer
- In-bay temperature monitoring system
- Waterproof hand held RF remote control for manual movement and machine functions
- Up to 16 wash packages can be saved and quickly copied to current wash packages
- Auto home feature



ADDITIONAL STANDARD FEATURES

Extended Solution Delivery (ESD) includes Bug A'Salt™ technology, tire wheel injector and 2 additional applications

High Pressure Delivery System - Ultra Compact Pump Station





UNDERCARRIAGE WASH MANIFOLD OPTIONS

- Undercarriage and Rocker Panel Blaster - 11 stainless steel nozzles; 3 on the undercarriage and 4 on each rocker panel blaster (for use with high pressure pump option)
- Medium pressure 5 hole undercarriage manifold (for use with non high pressure systems)
- Power Tower Wheel Cleaner® - 4 rotating nozzles per tower - Available with or without blue LEDs
- Big Shot™ - Chemical tire application

PROFILE SYSTEM OPTIONS

- 30 HP (6 - 5 HP motors) On-Board Dryer
- 40 HP (4 - 5 HP motors and 2 - 10 HP motors) On-Board Dryer
- In-bay horizontal pump station with composite covers and in-bay stainless steel ultimate control cabinet
- UCC power conversion kit (converts standard UCC for use with 240 VAC 3 phase 60 Hz incoming power supply)
- Free standing frame (stainless steel or powder coated)
- Wash bay stop / backup loading eye pedestal mounting kit - Free standing frame or non-standard bays
- E-chain supply passenger side / right side while entering the bay
- E-chain supply driver side / left side while entering the bay

WASH OPTIONS

- Tri-Color Foam application system - Both entrance & exit
- Foam 'n Flow® application system
- Medium pressure R.O. pump (13 GPM @ 110 psi) includes wall mount bracket and motor starter
- Spot free (R.O.) reject water reclaim system
- Reclaim system adapter kit
- Primary HS / Washview® MOBILE - High speed DSL or cable Internet connection capability - Internet access without a static IP address
- Secondary HS / Washview® MOBILE - Additional high speed DSL or cable Internet connection at same location for multi-bay sites
- Chem Alert™ - Chemical monitoring system
- Custom voice option for in-bay voice module
- Dual port injector system - To replace single injector for low pressure application (order per injector)
- Premium door controls - Includes eyes
- Ultimate door controls - Includes eyes
- Touch or Touch-Free Power Wheel Detailer™ (requires optional high pressure pump)
- SpectraRay™ - 4,528 LEDs (red, magenta, blue and green) - Light show during the wash process or while idle
- SpectraRay+™ - 5,568 LEDs (red, magenta, blue and green) - Mounting options: wall or pedestal mount
- Blow down - Protects against hose and major component damage during freezing temperatures
- Custom graphics
- Custom wash media colors



ADDITIONAL OPTIONAL FEATURES

Extended Solution Delivery (ESD) - Includes Bug A'Salt™ technology, tire wheel injector and 2 additional medium pressure applications

High Pressure Option - Ultra Compact Pump Station



PROFILE SPECS

PROFILE WALL MOUNT WASH BAY DIMENSIONS*

	OPTIONS	PREFERRED	*MINIMUM	MAXIMUM
HEIGHT* STANDARD & 30 HP OBD	15' 4" - 16' 9" Bay Widths 16' 9" - 18' 0" Bay Widths	12' (3658mm) 12' (3658mm)	11' (3353mm) 11' 4" (3454mm)	N/A
HEIGHT* 40 HP OBD ONLY*	15' 4" - 16' 9" Bay Widths 16' 9" - 18' 0" Bay Widths	12' (3658mm) 12' (3658mm)	11' 6" (3505mm) 11' 10" (3607mm)	N/A
WIDTH*	Without On-Board Dryer With On-Board Dryer	16' (4877mm) 16' (4877mm)	15' 4" (4674mm) 15' 4" (4674mm)	18' (5486mm) 18' (5486mm)
LENGTH*	Without Dryer Dryer With Covers	40' (12192mm) 45' (13716mm)	37' 4" (11379mm) 41' 6" (12649mm)	N/A

*NOTE: Minimum dimensions are from nearest inside obstructions entrance to exit e.g., door tracks, counterweights, etc. Add in additional length for these items.

PROFILE FREE STANDING FRAME DIMENSIONS*

	OPTIONS	PREFERRED	*MINIMUM	MAXIMUM
HEIGHT* STANDARD & 30 HP OBD	11' 6" (3505mm) (Frame)	12' (3658mm)	11' 8" (3556mm)	N/A
HEIGHT* 40 HP OBD ONLY*	12' (3658mm) (Frame)	12' 6" (3810mm)	12' 2" (3708mm)	N/A
WIDTH*	16' Width (4877mm) (Frame)	16' 6" (5029mm)	16' (4877mm)	N/A
LENGTH*	Without Dryer Dryer With Covers	40' (12192mm) 45' (13716mm)	37' 4" (11379mm) 41' 6" (12649mm)	N/A

*NOTE: Minimum dimensions are from nearest inside obstructions entrance to exit e.g., door tracks, counterweights, etc. Add additional length for these items.


PROFILE MINIMUM UTILITY REQUIREMENTS

Utility Requirements for standard Profile ST does not include options or other equipment requirements

Water:15 GPM @ 35 psi (56.7 l/m @ 2.41 bars)
 Air:100 psi @ 13 SCFM (6.89 bars @ 311 l/m)
 Electrical:208/230 VAC, 3 PH, 60 Hz (Five wire, three phase with neutral and ground)

VOLTAGE	UCC CABINET	PROFILE HIGH PRESSURE PUMP STATION	EACH DRYER MOTOR		ADD FOR EACH ON-BOARD DRYER MOTOR (6 TOTAL) 5HP
208 VAC	33 Amps	41 Amps	10 HP 27 Amps	15HP 40 Amps	13.7 Amps
230 VAC	30 Amps	37 Amps	10 HP 24 Amps	15HP 35 Amps	12.4 Amps

*NOTE: Specifications Subject to Change Without Notice. The decibel level of the dryer (measured at 1.6 meters from the floor and 1 meter from the surface) is 94dB. The decibel level of the pump station measured at 1.6 meters from the floor and 1 meter from the surface) is 84dB for high pressure and 72dB for low pressure. Decibel levels are impacted by surrounding materials and conditions therefore will vary.

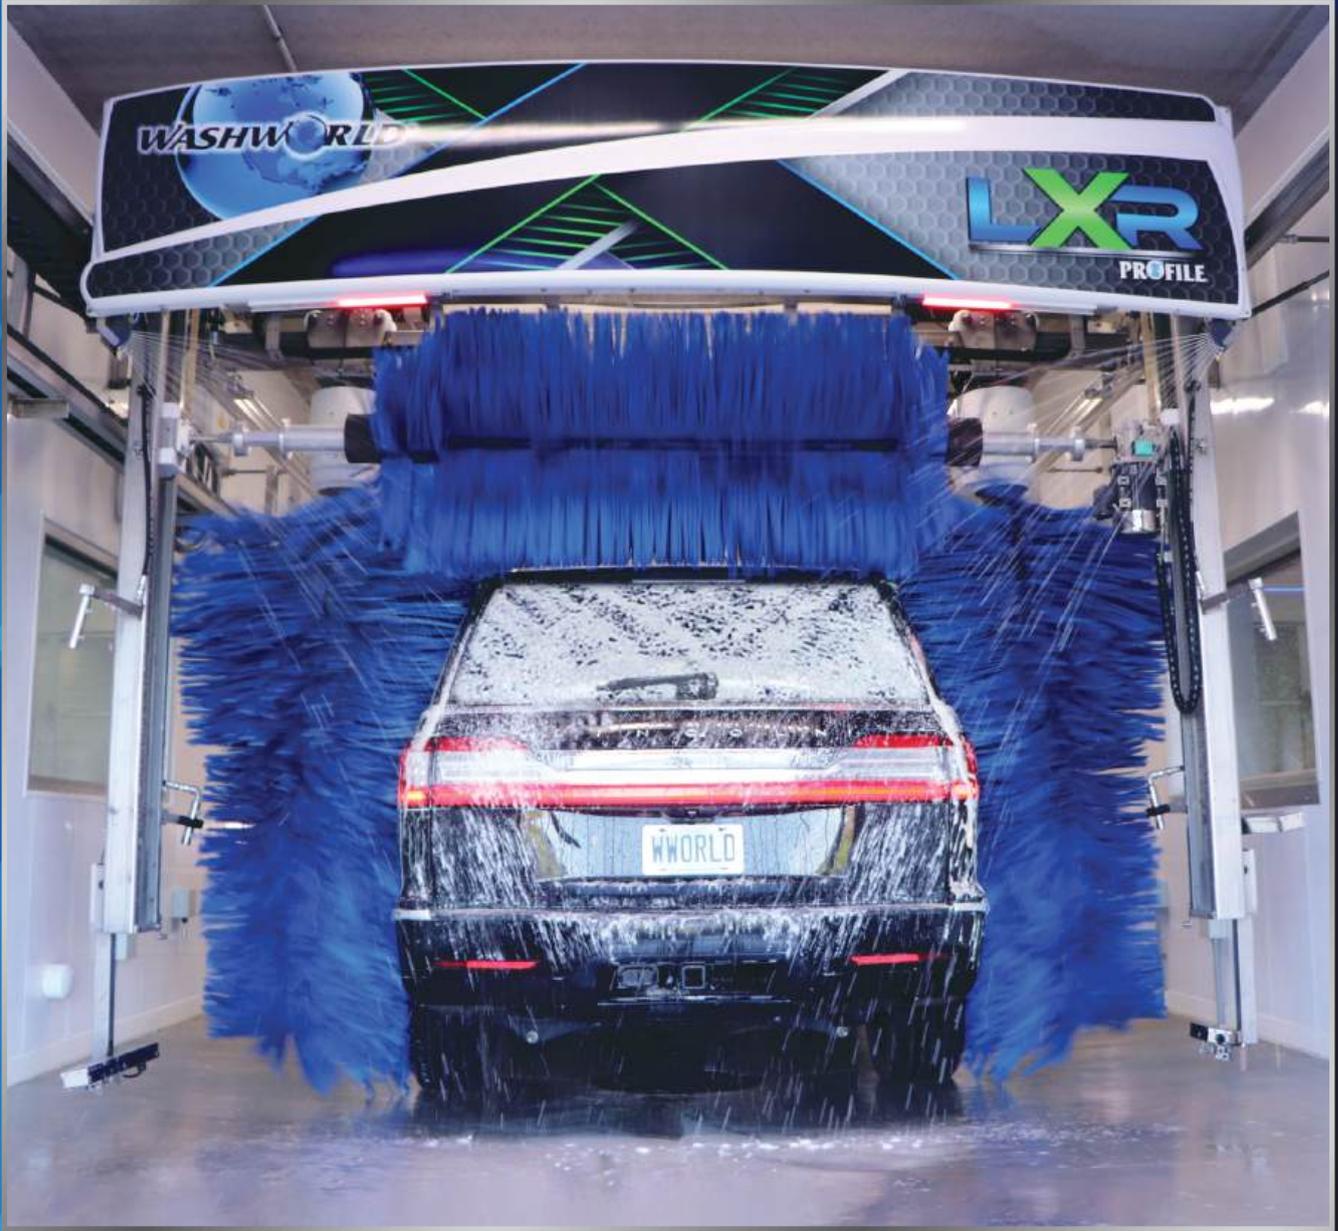

Washworld's Profile® LXR is the soft touch system that is specifically designed to fit into smaller wash bays. The compact carriage design along with reduced rail length allows for installation in shorter and narrower wash bays. Profile LXR delivers the same great Profile technologies at an economic price point.

WHAT MAKES PROFILE LXR DIFFERENT?



LONGEVITY / ROI

STAINLESS STEEL

Without a doubt, the most durable material for use in a car wash is stainless steel. When other manufacturers are using cheaper, less durable materials in their machines, Washworld refuses to compromise on quality and uses stainless steel throughout. The stainless steel used for Profile LXR's wall mounting system, travel rails and laser cut overhead wash carriage, ensures that Profile LXR is the most long lasting, durable system.

ADVANCED DRIVE MOTION TECHNOLOGY

Profile LXR belt drive utilizes multiple variable frequency drive technology with a clean and simple design. Both the rotation and independent movement of the dual side wash media and top wash media are variable frequency drive controlled to ensure a smooth operation and a precise application of all solutions and water. What does this mean for you? A gentle yet effective wash experience, no wasted water or chemicals, fewer moving components, less weight, reduced maintenance and most of all a quicker return on investment!

REDUCED MAINTENANCE

All Washworld systems are designed with a focus on reduced maintenance costs. Sealed gearboxes eliminate the need for oil changes. Reduced weight and less motion equal less wear and tear. High quality, premium components and materials withstand the harsh wash bay conditions resulting in a longer life.



COMPACT LAYOUT

Profile LXR utilizes a space saving design giving you more opportunities for smaller wash bay applications. The compact carriage design along with reduced rail length allows for installation in shorter wash bays. The compact energy chain layout allows for reduced bay width requirements and reduced plumbing requirements from the back room to the wash bay. Great addition for car dealership, rental agency or any application that requires a smaller footprint!



ENERGY CHAIN

Profile LXR's innovative cable carrier protects moving cables and hoses from abrasion and entanglement. The energy chain also provides a controlled bend radius of cables and hoses to prevent pinching or kinking. The non-metallic construction ensures quiet performance, longer cable life and extended supply line life.



SOFT TOUCH VEHICLE WASH SYSTEMS - PROFILE® LXR

PROFILE LXR STANDARD FEATURES




Especially important when positioning vehicles within a soft touch vehicle wash bay, Washworld's Vehicle Sizing System (VS²®), with precise loading feature, utilizes advanced software coupled with photo eye technology to provide a safe and reliable means of positioning the vehicle in the wash bay. This eliminates the need for floor mounted treadle plates or wheel stops, resulting in a significant reduction in wiring and fewer components to maintain.



DSP - DIGITAL SURFACE PROFILE

Washworld's exclusive DSP - Digital Surface Profile system is the advanced method of reading a vehicle's contours to allow for the most precise cleaning possible. Utilizing 3D imaging, DSP enables Profile LXR to adjust for various vehicle surfaces to deliver a wash that reaches every angle with Profile LXR's super soft polyethylene foam wash media. The DSP System offers consistent length, width and height measuring of vehicles for optimal product application and cleaning. This results in a gentle and effective wash experience and ensures that products are applied to the vehicle not the floor, which saves money and reduces wash times by customizing the travel distance of the Profile LXR based on the length of each individual vehicle.



WASH MEDIA

INNOVATIVE WASH MEDIA

Profile LXR's super soft blue side and top polyethylene foam wash media comes equipped with Clean Rinse, Washworld's wash media cleaning and lubricating system. The Clean Rinse System keeps the media from retaining dirt and debris which results in the best possible customer experience.

PROFILE LXR MIRROR DETAILER

The mirror detailer feature offers the ability to increase throughput by cleaning both sides of mirrors using a single soft touch pass. The wash media pass can start at the front or the rear, once the side brush has passed the mirror it will reverse direction to effectively clean both sides of the mirror, then completes the pass.

SIDE BRUSH EXCHANGE

This feature is an added benefit to customers that run a single side brush on the front and rear of a vehicle. When enabled, it will alternate each side brush ensuring that both the left and right brushes are used equally.



PROFILE LXR STANDARD FEATURES



Standard on Profile LXR is Washworld's Flex Pass® application system. This stainless steel, angled flood style pods and an overhead 6 nozzle stainless steel manifold applies up to 7 different applications to the entire vehicle (top, sides, front and rear). Each product can be applied to the vehicle in a single pass. Applications can be programmed from front to rear or rear to front to minimize machine movement. The speeds are adjustable individually in both directions which expedites the wash process to increase the throughput of cars, which in turn translates into greater profits for you!



EYE CATCHING LEDS

Dual 10" long green and red LEDs line the entrance side cover, combined with optional audible voice prompts that coincide with the in-bay instructional signage, help to position the vehicle in the wash bay. Even when idle, the red and green LEDs can sequence to draw attention to the wash bay with an eye-catching light show.



BUY-UP OPTION



Four customizable buy-up options allow your Auto Cashier to up-sell for you which renders greater wash package flexibility and maximized profits!



With Profile LXR's standard Washview® HMI On-Site, a color touch screen gives you complete access to Profile LXR including programming, maintenance, diagnostics, and wash counts. No on-site PC or laptop is needed to configure your wash. Profile LXR also features an integrated notification system which can monitor auto cashiers, doors, fluid levels and more. In addition, the Wash Package Storage capability allows for up to 12 wash packages to be retained which can be quickly copied to the immediate wash setup.



Waterproof hand held RF remote control for manual movement

PROFILE LXR OPTIONAL FEATURES



POWER TOWER WHEEL CLEANER

Effective wheel cleaning that will keep your customers coming back! The 40" high tower features 4 stainless steel zero degree rotating turbo nozzles, providing intense cleaning as well as great customer appeal. Power Tower Wheel Cleaner® manifolds are fabricated completely from stainless steel wrapped in a vibrant blue, rotationally molded polyethylene cover and is available with or without eye-catching blue LEDs. Not only is the Power Tower Wheel Cleaner effective for wheel cleaning, but it is great for removing mud, snow and ice from rocker panels and running boards!



BIG SHOT

CHEMICAL TIRE APPLICATION

Big Shot™ chemical tire applicator is constructed from stainless steel and specifically designed to target your tires/wheels for impeccable results. Pre-charged solution and air manifolds are photo eye activated and software controlled with customizable settings. Big Shot's strategic placement after the undercarriage provides maximum dwell time for optimal performance. Two application towers with three applicator nozzles on each tower per side (driver and passenger side) provide complete coverage. Top and bottom nozzles have a 10-degree angle adapter for precise application adjustment. Each application tower can deliver a different tire/wheel cleaning product (high pH and low pH) or a dual application of the same product.



UNDERCARRIAGE & ROCKER PANEL BLASTER

The undercarriage and rocker panel blaster is specially designed to thoroughly attack any dirt, debris and snow on the lower portion of your vehicle. For use with the high-pressure pump option, the undercarriage and rocker panel blaster consists of 11 stainless steel nozzles; 3 on the undercarriage and 4 on each rocker panel blaster. For use with non-high-pressure systems, it consists of a medium pressure 5 hole undercarriage manifold.



wwexclusive CHEM ALERT

Monitoring your chemical levels has never been easier! Washworld's chemical monitoring system allows you to remotely monitor up to 16 different product levels by utilizing an adjustable capacitive sensor that is mounted to each chemical container. The adjustable low-level sensor triggers an alert on the Washview® and a notification is conveniently sent via email or text. As an additional benefit, product labels can even be customized in your HMI to reflect the names of your products. Monitoring your chemical levels helps you to reduce system downtime and ensures your car wash is running smoothly.



PROFILE LXR OPTIONAL FEATURES



Washworld is launching an all-out war on bugs and salt residue with our extra step vehicle preparation Bug A'Salt™. This unique concentrated attack targets bugs and salt film on the front bumper/grill and windshield/mirrors leaving vehicles cleaner and your customers happier.

A specific bug/salt formulated product is applied through foaming pods utilizing a low-pressure injector. The foaming pods apply product from the front bumper/grill to windshield/mirrors and back for a double application providing extensive dwell time for superior results.

Bug A'Salt is included in the Extended Solution Delivery (ESD) option.



There is simply no better Tri-Color Foam application available! Washworld's Tri-Color Foam features completely adjustable nozzles for coverage the way you want it, where you want it.



SpectraRay+™ floods the wash bay with red, magenta, blue and green creating an ultimate light show that customers won't forget! It includes an adjustable stainless steel wall or pedestal mounted system and can be programmed to sequence through flashing colors for an intense experience or switch to a steady color at any point to coincide with your wash package. Even when idle, SpectraRay+ can sequence through color to draw attention to the wash bay with an eye-catching light show making it unique and memorable.



Washworld's optional Washview® Mobile provides virtually the same technologies as Washview On-Site (standard), however it allows you to access and control Profile LXR from anywhere in the world via a high-speed Internet connection. Washview Mobile uses the Vijeo Design'Air app (purchased separately) for your smart phone or tablet to give you mirror image access of your HMI. It even gives you the ability to receive text or email notifications to keep you fully informed!



SOLUTION DELIVERY SYSTEM (SDS)

Profile LXR's wall mounted stainless steel solution delivery panel is built with high quality materials and built to last. The Solution Delivery System comes loaded with standard features such as direct feed solutions system and stainless steel chemical manifold. The solution delivery pump is wall mounted utilizing its own stainless steel bracket.

Washworld's Profile LXR's optional Ultra Compact High-Pressure Pump Station features a poly tank with electronic fill valve and capacitive level sensor, CAT 2530 pump complete with remote oil drain kit, leveling feet and easy access to all serviceable components.

MEDIUM PRESSURE SDS STANDARD FEATURES

- Wall mounted stainless steel pump panel
- 4 Composite direct injectors
- Direct feed solutions system provides more control
- Stainless steel chemical manifold
- Stainless steel / composite direct feed chemical delivery system
- Flex Pass® application system

OPTIONAL FEATURES

- Extended solution delivery (ESD) including Bug A'Salt™ technology, Tri-Color Foam application system and 2 additional applications
- Big Shot™ chemical tire application
- Spot free re-pressurization pump
- Cold climate blow down

ULTRA COMPACT HIGH PRESSURE DELIVERY SYSTEM

- Space saving design, simple installation, easy to maintain
- Heavy duty powder coated frame utilizes proven protective primer
- Cat 2530 Pump - Variable pressure, 25 GPM
- One piece rotationally molded corrosion proof MDPE tank
- Electronic control valve / capacitive tank level sensor


Standard Solution Delivery
System Injectors

Extended Solution Delivery /
Tri-Color Foam Injectors



IN - BAY EQUIPMENT PACKAGE

For locations without an equipment room, the In-Bay equipment package comes with the Pump Station that offers the same cutting-edge technology incorporated in a space saving design to be located directly in your wash bay. Featuring a one piece heavy duty frame, stainless steel bulk head manifold for incoming and outgoing supply lines. Removable non corrosive ABS panels for the front, back, sides and top keep direct water spray and debris out. It includes an easy access port for maintenance without removing the panels. The standard UCC is replaced with a stainless steel cabinet, and a hinged water resistant, clear polycarbonate HMI cover. The In-Bay Equipment Package is designed for long life in even the harshest of conditions.

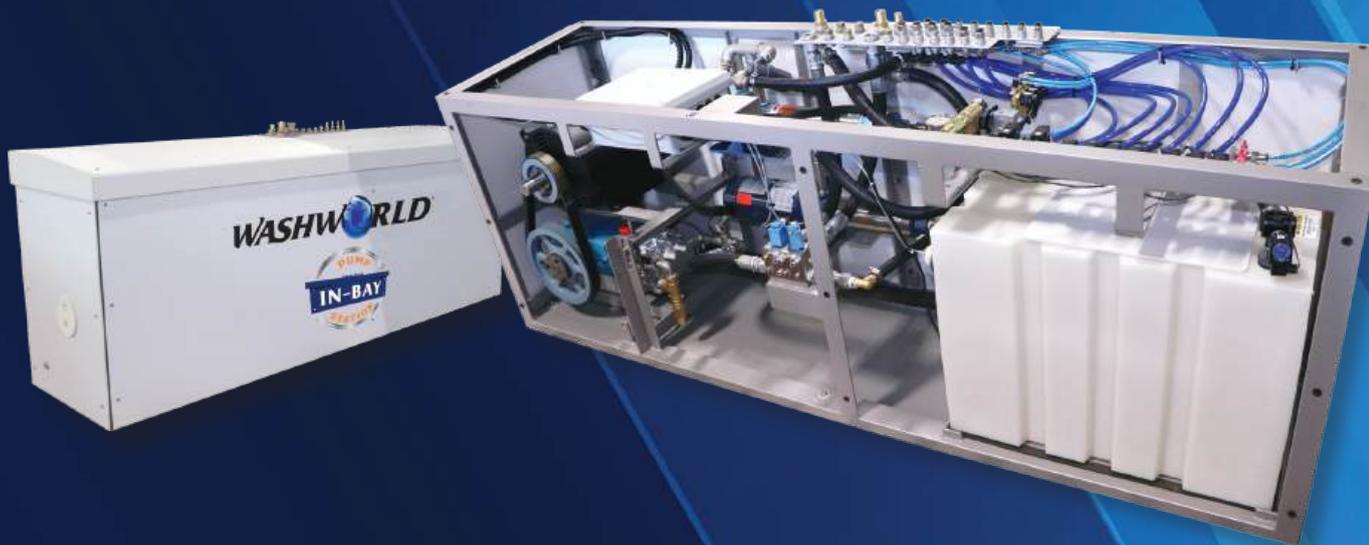

STANDARD FEATURES

- Simple to install, space saving design: 37"H x 96"L x 26"D
- Deluxe cover package with enclosed base protects equipment and looks great in your bay
- Removable panels allow for complete access and easy maintenance
- Heavy duty powder coated frame utilizes proven protective primer
- Cat 2530 Pump - Variable pressure, 25 GPM
- Deluxe oil change kit allows easy access for service
- 4 Composite direct injectors
- One piece rotationally molded corrosion proof MDPE tank
- Stainless steel top feed and discharge manifold
- Direct feed solutions system provides more control
- Stainless steel chemical manifold
- Stainless steel / composite direct feed chemical delivery system
- Flex Pass® application system

OPTIONAL FEATURES

- Extended solution delivery (ESD) including Bug A'Salt™ technology, Tri-Color Foam application system and 2 additional applications
- Big Shot™ chemical tire application
- Built in spot free re-pressurization system
- Reclaim system adapter kit
- Cold climate blow down



IN-BAY WALL MOUNT SYSTEM - STAINLESS STEEL

- Stainless steel travel rails (29' 0" overall length)
- Stainless steel wall mounting hardware
- Floor mounted blue reflectors for visual guidance

OVERHEAD CARRIAGE AND TROLLEY FRAME - LASER CUT STAINLESS STEEL

- High gloss composite wash carriage front cover and side wash media covers
- Dual 10" long red and green LEDs mounted on entrance cover
- Variable frequency controlled belt drive carriage and trolley movements
- VS²® (Vehicle Sizing System)
- DSP (Digital Surface Profile) technology
- Composite energy chain for electrical and solution distribution
- Super soft blue polyethylene foam wash media (side and top)
- Clean Rinse System - Wash media cleaning and lubricating system
- Stainless steel carriage, climate proof motors and gearboxes
- Flex Pass® application system
- Mirror detailer - Cleans both sides of mirrors in a single pass
- Side brush exchange

SOLUTION DELIVERY SYSTEM (SDS) / WALL MOUNTED STAINLESS STEEL PUMP PANEL

- Multiple stage solution delivery SDS system (capable of 225psi)
- Wall mounted stainless steel pump panel
- 4 composite direct injectors
- Direct feed solutions system provides more control
- Medium pressure rinse capability

ULTIMATE CONTROL CABINET

- Electrical control panel 208VAC (VFD controls on seven motors)
- Washview® HMI On-Site control interface - Complete on-site programming and diagnostic capability
- Wash activation buy-up compatibility
- Integrated notification system
- Audio stop horn to reinforce in-bay sign instructions
- Waterproof hand held RF remote control for manual movement
- Up to 12 wash packages can be saved and quickly copied to current wash packages
- Auto home feature

PROFILE LXR WALL MOUNT WASH BAY DIMENSIONS*

	OPTIONS	PREFERRED	*MINIMUM	MAXIMUM
HEIGHT*	14' 0" - 16' 9" (4267 - 5104mm) Bay Width 16' 9" - 18' 0" (5104 - 5486mm) Bay Width	12' (3658mm) 12' (3658mm)	11' (3353mm) 11' 4" (3454mm)	N/A
WIDTH*	29' 0" Rails (8839mm) (Standard)	15' 0" (4572mm)	14' 0" (4267mm)	18' (5486mm)
LENGTH*	29' 0" Rails (8839mm) (Standard)	33' 0" (10058mm)	32' 0" (9753mm)	N/A

*NOTE: Minimum dimensions are from nearest inside obstructions entrance to exit, and bay floor to ceiling, e.g. door tracks, counterweights, etc. Add in additional length for these items.

PROFILE LXR FREE STANDING FRAME DIMENSIONS*

	OPTIONS	PREFERRED	*MINIMUM	MAXIMUM
HEIGHT*	11' 5" (3479mm) (Frame)	12' (3658mm)	11' 5" (3479mm)	N/A
WIDTH*	14' 3" (4343mm) (Frame)	15' 0" (4572mm)	14' 3" (4343mm)	N/A
LENGTH*	29' 0" Rails (8839mm) (Standard)	33' 0" (10058mm)	32' 0" (9753mm)	N/A
LENGTH*	29' 0" Rails (8839mm) w/Profile LXR & Dryer With Covers	37' 0" (11278mm)	35' 6" (10820mm)	N/A

*NOTE: Minimum dimensions are from nearest inside obstructions entrance to exit, and bay floor to ceiling, e.g. door tracks, counterweights, etc. Add in additional length for these items.



UNDERCARRIAGE WASH MANIFOLD OPTIONS

- Medium pressure 5 hole undercarriage manifold (for use with non high pressure systems)
- Undercarriage and Rocker Panel Blaster - 11 stainless steel nozzles; 3 on the undercarriage and 4 on each rocker panel blaster (for use with high pressure pump option)
- Power Tower Wheel Cleaner® - 4 rotating nozzles per tower - Available with or without blue LEDs
- Big Shot™ - Chemical tire application

PROFILE SYSTEM OPTIONS

- In-bay horizontal pump station with composite covers and in-bay stainless steel ultimate control cabinet
- UCC power conversion kit (converts standard UCC for use with 240 VAC 3 phase 60 Hz incoming power supply)
- Free standing frame (stainless steel or powder coated)
- E-chain supply passenger side / right side while entering the bay
- E-chain supply driver side / left side while entering the bay

WASH OPTIONS

- Extended Solution Delivery (ESD) - Includes Bug A'Salt™ technology, Tri-Color Foam application system and 2 additional low pressure applications
- Medium pressure R.O. pump (13 GPM @ 110 psi) includes wall mount bracket and motor starter
- High Pressure Option - Ultra Compact Pump Station
- Spot free (R.O.) reject water reclaim system
- Reclaim system adapter kit
- Primary HS / Washview® MOBILE - High speed DSL or cable Internet connection capability - Internet access without a static IP address
- Secondary HS / Washview® MOBILE - Additional high speed DSL or cable Internet connection at same location for multi-bay sites
- Chem Alert™ - Chemical monitoring system
- In-bay voice module to communicate Profile LXR actions to customer
- Custom voice option for in-bay voice module
- Dual port injector system - To replace single injector for low pressure application (order per injector)
- Premium door controls - Includes eyes
- Ultimate door controls - Includes eyes
- SpectraRay+™ - 5,568 LEDs (red, magenta, blue and green) - Mounting options: pedestal mount or free standing frame
- Blow down - Protects against hose and major component damage during freezing temperatures

PROFILE LXR MINIMUM UTILITY REQUIREMENTS

Water:15 GPM @ 40 psi (56.7 l/m @ 2.75 bars) 1" supply
 Air:13 SCFM @ 40 psi (368 l/m @ 2.75 bars)
 Electrical: 208/230 VAC, 3 PH, 60 Hz (with neutral (4-wire) ground)

VOLTAGE	UCC CABINET	PROFILE LXR HIGH PRESSURE PUMP STATION	EACH DRYER MOTOR (FLA)	
			10 HP	15HP
208 VAC	28 Amps	40 Amps	27 Amps	40 Amps
230 VAC	25 Amps	36 Amps	24 Amps	35 Amps

*NOTE: Specifications Subject to Change Without Notice. The decibel level of the dryer (measured at 1.6 meters from the floor and 1 meter from the surface) is 94dB. The decibel level of the pump station measured at 1.6 meters from the floor and 1 meter from the surface) is 84dB for high pressure and 72dB for low pressure. Decibel levels are impacted by surrounding materials and conditions therefore will vary.

HIGH VELOCITY VEHICLE DRYING SYSTEM

The Washworld High Velocity® Free Standing and Wall Mount Vehicle Drying Systems incorporate proven energy efficient air producer designs. All of that power wrapped in our optional dryer image package make your wash stand out from your competitors...and keep your customers coming back for more!

STANDARD FEATURES

- Safe touch-free drying
- All aluminum, stainless steel and HDPE construction with welded impellers
- Stainless steel inlet / outlet screens
- Noncorroding HDPE producer housings
- Completely adjustable producer housings for enhanced drying coverage
- Stainless steel mounting hardware
- Energy efficient industrial 7.5 HP, 10 HP, or 15 HP TEFC motors

OPTIONAL FEATURES

- Aluminum cross beam and brackets for interior wall mount
- Powder coated aluminum frame for exterior (building face) wall mount or for interior / exterior (free standing) floor mount
- Energy conserving dryer shut-off kit
- Center producer shut off kit - When passing over the bed of a pickup truck contents of the truck bed aren't affected by the center dryers
- Dryer image package (front / rear covers)
- Custom graphics
- Blue LED dryer cover lighting
- Dryer cover with LED wash instruction signage
- LumenDry™
- LED countdown timer with stand or wall mount
- Dryer motor starter panel with stagger start controls
- VFD - Variable frequency drive motor starter control center
- Available in international voltages, including 380-415/50 Hz & 575/60 Hz
- Sound reduction package
- Elephant trunks
- Air knives
- Producer swivel plates

HIGH VELOCITY OSCILLATING NOZZLE

- Performance enhancing
- Available on single and dual nozzle dryer producers
- Pneumatic cylinder controlled, no in-bay wiring, fewer moving parts
- Stainless steel diverter gate (dual gate on a single producer, quad gate on a dual producer)
- Airflow channeled in a 50 degree sweeping motion



*Shown with blue LED dryer cover lighting and LED wash instruction signage



Numerous dryer configurations available. Contact Washworld today for more information!



Standard Arch
3 Producers



Standard Arch
4 Producers



Standard Arch 4
Producers, Dual Nozzle,
E-Trunks w/ Brackets



Standard Arch
5 Producers,
E-Trunks w/ Brackets



Interior or Exterior
Wall Mount



Progressive
Drying System

ON-BOARD VEHICLE DRYING SYSTEM

Washworld Profile On-Board Vehicle Drying Systems provide controlled and consistent drying which results in greater customer satisfaction. The On-Board System moves together with the wash carriage while the customer's vehicle remains stationary for consistent drying. Where wash bay space is limited or for noise abatement, the On-Board Drying System is the answer!



PROFILE **PROFILE**
ST MAX

40 HP OPTIONAL ON-BOARD DRYER

- Available on Profile ST and Profile MAX
- Consistent, controlled touch-free drying
- Producers are constructed from stainless steel, composites and aluminum with welded impellers
- Powder coated aluminum inlet cone and producer back plate / motor mount
- Stainless steel inlet / outlet screens
- 6 producer configuration - (4) 5 HP aluminum / composite producer housing (sides), (2) 10 HP aluminum producer configuration (top)
- Energy efficient, space saving design
- Totally enclosed fan cooled industrial 5 HP and 10 HP motors
- Pre-wired and assembled energy chain for power supply
- On-Board drying process can initiate in either the front or rear of vehicle and can be programmed to run multiple drying passes
- On-Board Dryer can be programmed to continue operation in a fixed position as the vehicle exits for additional drying
- cETLus listed, CE compliant

30 HP OPTIONAL ON-BOARD DRYER

- Available on Profile ST and Profile MAX
- Consistent, controlled touch-free drying
- Producers are constructed from stainless steel, composites and aluminum with welded impellers
- Powder coated aluminum inlet cone and producer back plate / motor mount
- Stainless steel inlet / outlet screens
- 6 producer configuration - (6) 5 HP aluminum / composite producer housing (sides and top)
- Energy efficient, space saving design
- Totally enclosed fan cooled industrial 5 HP motors
- Pre-wired and assembled energy chain for power supply
- On-Board drying process can initiate in either the front or rear of vehicle and can be programmed to run multiple drying passes
- On-Board Dryer can be programmed to continue operation in a fixed position as the vehicle exits for additional drying
- cETLus listed, CE compliant

OPTIONS

- Stagger start motor control center
- VFD - Variable frequency drive motor starter control center
- Sound reduction package
- Available in international voltages, including 380-415/50 Hz and 575/60 Hz
- Center producer shut off kit (for open bed trucks)

OPTIONAL DRYER SYSTEM FEATURE



Elevate your customer's car wash dryer experience with LumenDry™! When the High Velocity® dryer is activated, radiant red LEDs engulf the drying area of the wash bay and blanket the vehicle as it passes through the dryer signifying the warmth of the drying process. The extra pizzazz emanating from LumenDry is sure to be a memorable experience! LumenDry, available on Washworld High Velocity Free Standing and Wall Mount Vehicle Drying Systems, contains one LED assembly for each producer housing and four LED assemblies for each set of elephant trunks and air knives.



12V SIGNS

Washworld's 12V LED signs are fabricated from stainless steel with adjustable mounting brackets. The white 8 panel LED signs are available with a protectant panel, Tri-Color Foam panel or can be fully customized to match your sites branding. The LEDs can be located on either the left or right side of the panel to accommodate your wash bay needs. The stop / drive forward sign is available with or without wash progress, which informs the customer of the estimated remaining wash time.



24V SIGNS

Washworld's 24V signs have a fully LED back-lit silver face with a white fiberglass housing. The 8 panel LED signs are available with or without the Tri-Color Foam panel.



COUNTDOWN TIMERS

Washworld's 24V countdown timers clearly inform the customer of the remaining dryer time. They are available as wall mounted or pedestal mounted. The countdown timers can be fabricated from stainless steel or a white fiberglass housing with a 2 digit LED display. Customizable options available upon request.



12V CAR WASH OPEN/CLOSED SIGN

Easily inform your customers whether your car wash is open or closed. Washworld's stainless steel 12V LED open/closed car wash signs are not only energy efficient but also built to last. The open/closed status changes automatically based on the wash ready/out of service signal from the car wash equipment.



SIGNS


CLEARANCE SIGNS

Keep your customers informed of maximum overhead clearance when entering your car wash. Washworld's composite clearance signs are available non-lit or back lit with energy efficient LEDs. The sign face is customizable to compliment the site's branding. The HDPE color comes standard in blue, but is available in custom color options: red, yellow, green, gray and black. Clearance signs have additional mounting options that include hanging or ground mounted to fit the site's needs. The ground mounted option is powder coated white for durability and includes a breakaway feature.



WASH BAY LED GUIDE LIGHTING

Washworld offers floor mounted guide lighting (sold in pairs) to help assist through the wash process. The guide lighting illuminates red or green in accordance with the in-bay instructional signage.

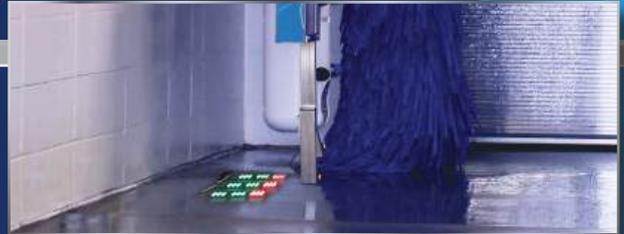

WATER TREATMENT

WATER SOFTENERS STANDARD FEATURES

- Systems from 60,000 to 600,000 grain capacity (twin alternating)
- Twin alternating systems provide continuous soft water 24/7
- Simple, fully programmable controller maximizes efficiency and reduces operating costs
- Clack valves
- Noryl® composite valve body eliminates corrosion
- Professional series resin tanks
- PVC hub and lateral distribution system
- Brine tanks sized to match system requirements
- Retains custom program settings in the event of power interruption
- Electronic control interlock for multiple tank synchronization
- Incoming operating water - pressures from 30 - 100 psi
- Incoming operating water temperatures from 35°F-100°F
- Space saving footprint
- cETLus listed, CE compliant



OPTIONAL FEATURES

- Iron filtration
- Custom, tri-plex or over-sized systems to meet your specific site needs

MODEL	TYPE	SYSTEM GRAIN CAPACITY	PEAK FLOW	CU. FT. OF RESIN
WW 2100T-1	Twin Alternating	60K	14 GPM	2
WW 2101T-1	Twin Alternating	150K	17 GPM	5
WW 2102T-12	Twin Alternating	180K	33 GPM	6
WW 2103T-15	Twin Alternating	300K	62 GPM	10
WW 2104T-15	Twin Alternating	420K	62 GPM	14
WW 2105T-2	Twin Alternating	300K	85 GPM	10
WW 2106T-2	Twin Alternating	420K	85 GPM	14

Note: Specifications subject to change without notice.

WATER TREATMENT

Washworld's Water Wise Reverse Osmosis (R.O.) system is fully tested and manufactured for maximum efficiency. The unit features an activated carbon pre-filter tank with programmable automatic backwashing and thin-film, high-efficiency membranes in your choice of either stainless steel or fiberglass housings. The system also includes continuous electronic totally dissolved solids monitoring and can be floor standing or wall mounted. Available in sizes of 2,400 GPD, 4,800 GPD, 7,200 GPD, and 9,600 GPD and typically available for shipment within a week!



STANDARD FEATURES

- 2400, 4800, 7200 or 9600 GPD (gallons per day) systems (Based on 77°F incoming water supply)
- Membrane housing is available in stainless steel or fiberglass
- Stainless steel frame
- All units are floor or wall mountable
- Activated carbon pre-filter tank with programmable automatic backwashing
- 4" x 40" thin film high efficiency membranes
- Large diameter, easy to read inlet, pump and membrane pressure gauges
- Permeate (product) and concentrate (reject) flow meters
- Pre-plumbed water test port
- Automatic inlet water shut-off valve
- Easily replaceable 2.5" x 20" cartridge style pre-filters on all systems
- VROC digital R.O. control
- Audible and visual alerts/alarms
- Continuous electronic TDS (total dissolved solids) monitoring with audible alarm with adjustable setting
- Automatic membrane flushing
- Low pressure automatic restart
- cETLus listed, CE compliant

OPTIONAL FEATURES

- Water storage tanks (UV rated)
- Re-pressurization pumps with mounting brackets



WATER WISE R.O. SPECIFICATIONS

MODEL	50220040	50220041	50220042	50220045	50220046	50220047
GALLONS PER DAY	2400	4800	7200	2400	4800	7200
NO. OF MEMBRANES	1	2	3	1	2	3
MEMBRANE HOUSING	Fiberglass	Fiberglass	Fiberglass	Stainless Steel	Stainless Steel	Stainless Steel
PUMP H.P.	1 HP	2 HP	2 HP	1 HP	2 HP	2 HP
ELECTRICAL REQUIRED	230 VAC 1 Phase 10 Amps	230 VAC 1 Phase 13 Amps	230 VAC 1 Phase 13 Amps	230 VAC 1 Phase 10 Amps	230 VAC 1 Phase 13 Amps	230 VAC 1 Phase 13 Amps

Washworld takes our commitment to customer satisfaction very seriously and do our utmost to help car wash owners around the world run successful businesses. We offer expertise to every car wash owner from initial business planning, site selection, equipment layout, renovations and upgrades to 24/7 technical support and advice after the sale. Our service priority means no customer is ever just a number.



FREE ONLINE TECHNICAL TRAINING

The Washworld Customer Care Program leads the industry in customer service. Washworld takes that commitment to customer satisfaction very seriously by offering Free Online Technical Training to improve operator proficiency. The training is presented by several Washworld technicians and engineers who have years of experience with Washworld equipment as well as the car wash industry as a whole. Some of the items covered in this comprehensive course include wash components and their function, system installation, quick reference start up, routine maintenance, Washview® programming and troubleshooting.



TECHNICAL SUPPORT

Washworld is known for our world class customer service. With over 100 Distributors worldwide and a Technical Support Department, we can assist operators day or night, 24/7. Utilizing Washworld's exclusive Washview® Remote, you and our technical professionals are able to track your wash site performance from anywhere in the world often preventing the need for an on-site service call. Best of all, there is never a charge for Washworld technical support after the sale. At Washworld, we stand behind our vehicle wash systems and strive to provide the assistance you, our customer, need so that you're never alone. This is yet another example of our motto, "Our World Revolves Around Your World" in action.



REPLACEMENT PARTS

Keeping your vehicle wash system running is our priority. Pictorial parts books are available online for easy identification of components and part numbers. Need help? With over 100 Distributors worldwide, contact your local Washworld Distributor or Washworld's 24/7 technical support team for assistance!



Washworld backs our equipment with a written warranty, which sets the bar in the car wash industry. Don't take our word for it, ask any Washworld customer!

WASHWORLD EQUIPMENT LIMITED WARRANTY

Washworld Inc., a Wisconsin Corporation ("Washworld") warrants to the original purchaser of Washworld car wash equipment that the equipment will be free from defects in materials and workmanship for a period of 400 days from date of shipment, with the exception of the Cat Pump which is warranted for two (2) years. Claims under this warranty must be asserted in writing to Washworld within 10 days of discovery or before the end of the applicable warranty, whichever occurs first, and must follow the Washworld "RMA" (Returned Materials Authorization) process.

Any component or part alleged to be defective in materials or workmanship shall, at the option of Washworld, be returned with shipping cost prepaid. If upon examination such component or part is found to be defective in workmanship or materials, Washworld, at its option, will either repair or replace such component or part and ship such repaired or replaced component or part via standard ground. Expedited shipping costs (if requested) shall be the responsibility of purchaser. The cost of such replacement or repair (less any labor charges) shall be the exclusive remedy for any breach of any warranty and Washworld shall not be liable to any person for consequential damages for injury or commercial loss resulting from any breach of any warranty. This warranty does not cover any labor installation cost, either with respect to the original equipment or with respect to the repaired or replaced component or part which is found to be defective in workmanship or materials. Washworld does not warrant loss of income, or consequential damages, should there be any, during the time repairs are being made.

This warranty does not apply to damage resulting from components or parts that have been misused, altered, neglected, or not installed, adjusted, maintained, or used in accordance with applicable codes and ordinances and in accordance with Washworld's or manufacturer's recommendations. This warranty does not apply to damage resulting from improper operation or abuse, exceeding the rated capacities of the unit, running foreign particles or non-related solutions through pumps or valves, using acidic solutions, improper installation or maintenance, operational neglect, neglect of manufacturer's recommended maintenance, use of water containing solids in excess of twenty microns in diameter or 2000 PPM, damage caused by customer, unjustifiable nuisance calls or acts of God.

This warranty is in lieu of all other warranties, express or implied, and there are no warranties against infringement, of merchantability, of fitness for a particular purpose, or arising from course of dealing or usage of trade. Washworld shall not be liable for direct, indirect, incidental, special or consequential damages under any circumstances, including but not limited to: damage or loss resulting from inability to use the products, increased operating costs, or loss of sales, lost profits, punitive damages, or any other damages. Compliance with any laws or regulations relating to the sale, location, use or operation of the equipment, or its use in conjunction with other equipment shall be the sole responsibility of the purchaser. The rights and obligations of the parties shall be governed by the laws of the State of Wisconsin.

Washworld reserves the right to change or modify this Limited Warranty at any time without notice.



WASHWORLD

2222 American Blvd.
De Pere, WI 54115

© 2025 Washworld, Inc.

rev.3-2025