




Introducing the New Evolution Series

Oscillating Nozzle | Flip Nozzle

Oscillating Nozzle

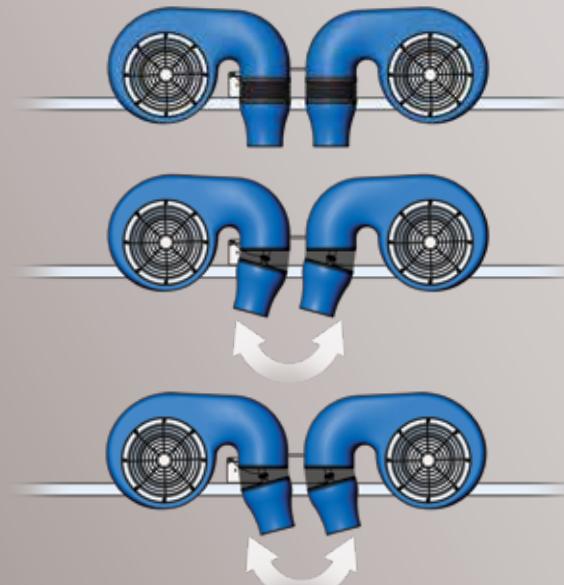

Oscillating Nozzle


- Swings left and right approximately 30 degrees
- Pneumatic or electric actuation
- Available in single or dual configurations



- HDPE producer housing colors available:


Blue	Black	Granite Gray	Red	Green	Yellow
------	-------	--------------	-----	-------	--------
- Fiberglass cover with custom graphics available
- LED backlit cover with custom graphics available
- UL Listed VFD and standard starter panels available
- LED lighting available
- Custom applications available
- 5 HP available upon request

Flip Nozzle

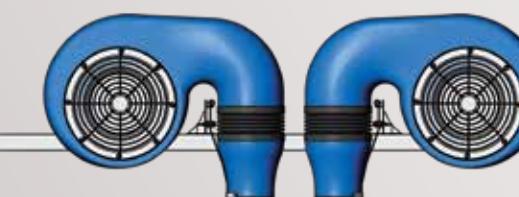

Flip Nozzle

- Swings approximately 15 degrees in both forward and backward directions
- Pneumatic actuation
- Activated by photo or sonar detection
- Available in left, right, or dual configurations
- Great addition for drying the rear of vehicles

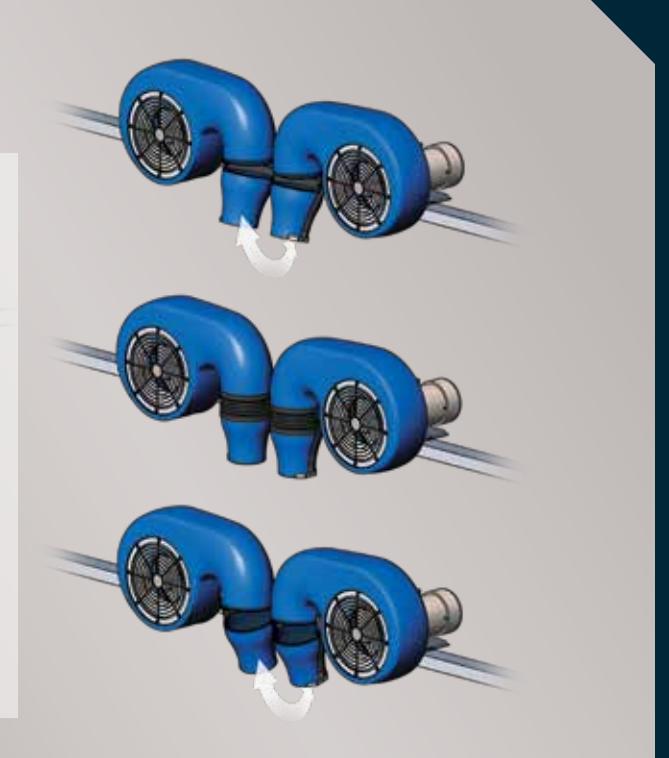

Fixed Nozzle Adapter

- May be used as a standalone nozzle, or as an adapter for air knives and e-trunks
- Allows an e-trunk or air knife to be adjusted 360 degrees



Evolution Producer Specifications

	10 HP Producer	15 HP Producer
208 V FLA	29.0 amps	40.2 amps
230 V FLA	26.2 amps	36.36 amps
460 V FLA	13.1 amps	18.18 amps
SF amps	1.15 60 Hz / 1.0 50Hz	1.15 60 Hz / 1.0 50Hz
CFMs	4500	4800
RPM	3600	3600
Air Velocity	140 mph	147 mph
TEFC Motors	3 Phase	3 Phase
Frame Size	213 Tc	213 / 5 Tc
Total Weight	119 lbs	128 lbs

Efficiency Level - (Minimum), 88.5% guaranteed efficiency, Nema NCM efficiency (Normal) 90.2%

Nozzle Extensions

