

TIRE CLEANER

Tire Cleaners are a versatile and highly effective cleaning solution for almost any style vehicle or equipment cleaning. Simple installation and versatile design allow for High-Low pressure or High-Low fluid volumes. The Hydro-Drive design eliminate the need for motor drive systems. Reliable spray patterns and impacts are set to your pump systems by simply changing nozzles. For short or long distances this Tire Cleaner is sure to get the job done effectively and efficiently.



PART NO	SWIVEL	ROTOR ARM	WEIGHT
84.504	DYF	16"/10"	15.8 lbs.
84.514	DYF	18.5"/14"	16.1 lbs.
84.509	DYT	16"/10"	18.5 lbs.
84.519	DYT	18.5"/14"	17.8 lbs.



Distance	Cleaning Surface
10"	18"
20"	28"
30"	38"
40"	48"

TECHNICAL DATA


- Pressure: 4000 PSI
- Temperature 250°F
- RPM: up to 2000 rpm
- Water connection: 3/8" NPTF
- Nozzle connection 4x 1/8" NPTF
- Throughput medium: pH 3-12

EQUIPMENT DESCRIPTION

- Polished stainless steel
- Equipped with stabilizer nozzles
- Seamless variable height adjustment
- Can install multiple cleaning heads
- High impact at a distance
- Requires 4x EG-nozzles, according to your pump specification

PART NO	SWIVEL	ROTOR ARM	STAB. NOZZLE/ADAPTER	INSERT NOZZLE	STAND	WEIGHT
85.546	DYTiS	TKA 6"	4x 14.901	**	yes	25 lbs.
84.596	DYTiS	TKA 6"	4x 14.901	**	no	9.2 lbs.

** Requires 4x eg-nozzles, according to your pump specifications

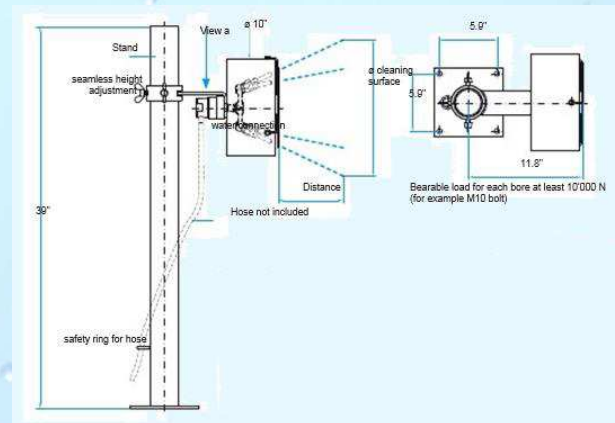

11-11-15



2361 South Plaza Drive Rapid City, SD 57702
 605-341-5154 | 800-666-3664 | Fax: 605-341-4843
 Visit our web site at: www.pressureservices.com